

Cent

OFL 100 224 054A 8030 10 99 OP 40 LC




Surface Mounted Linear Luminary




Luminaire Group	Linear
Mounting Type	Surface Mounted
Luminary Color	RAL 9005 - RAL 9010
Housing	Aluminum extruded profile
Optics	Opal Diffuser & Lens 35°
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	03
Operating Temperature	-20°C / +40°C
Luminous Flux	3870
Consumption Power	54
Luminaire Efficiency	70 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours

Technical Drawing



Photometric Curve

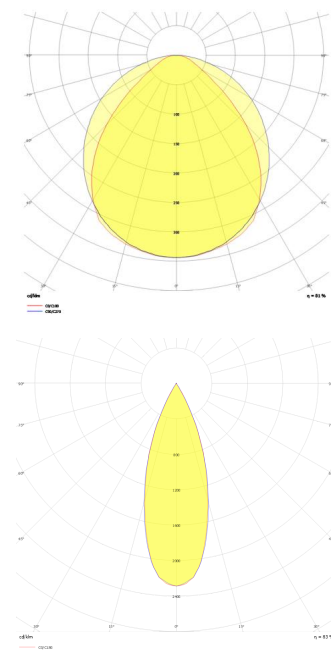

www.atellighting.com

Cent

OFL 100 224 054A 8030 10 99 OP 40 LC



Surface Mounted Linear Luminary

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	OFL 100 224 054A 8030 10 99 OP 40 LC	54	3870	>80	4000	35° Opal Diffuser	2400x47x70