

# Cent

OFL 100 296 069A 8030 10 99 OP 40 LC




Surface Mounted Linear Luminary




<b>Luminaire Group</b>	Linear
<b>Mounting Type</b>	Surface Mounted
<b>Luminary Color</b>	RAL 9005 - RAL 9010
<b>Housing</b>	Aluminum extruded profile
<b>Optics</b>	Opal Diffuser & Lens 35°
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	40
<b>IK</b>	03
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	4860
<b>Consumption Power</b>	69
<b>Luminaire Efficiency</b>	70 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours

Technical Drawing



Photometric Curve

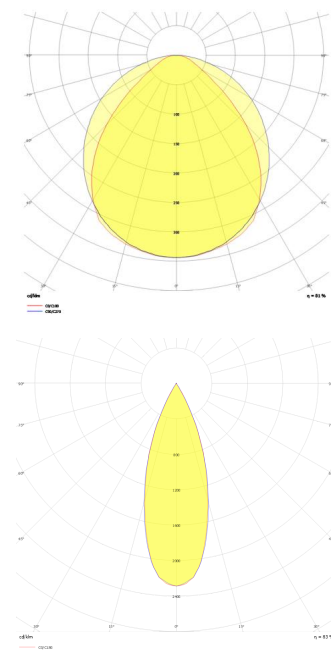

## **Cent**

OFL 100 296 069A 8030 10 99 OP 40 LC



Surface Mounted Linear Luminary

---

<b>SKU</b>	<b>Product Code</b>	<b>Power (W)</b>	<b>Luminous Flux (LM)</b>	<b>CRI</b>	<b>CCT (K)</b>	<b>Optics</b>	<b>Dimensions (mm)</b>
	OFL 100 296 069A 8030 10 99 OP 40 LC	69	4860	>80	4000	35° Opal Diffuser	2960x47x70