

ThinPower

TPW 030 090 036S 8040 10 40 LN 40 TK




Surface Mounted Linear Luminary




| | |
|--------------------------------------|--|
| Luminaire Group | Linear |
| Mounting Type | Surface Mounted |
| Luminary Color | RAL 9010 - RAL 9005 |
| Housing | Aluminum extruded profile |
| Optics | Reflector |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 40 |
| IK | 03 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 4370 |
| Consumption Power | 36 |
| Luminaire Efficiency | 121 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >70.000 hours |
| Option | On-Off / Dali / 1-10V / With Emergency Kit |

Technical Drawing



Photometric Curve

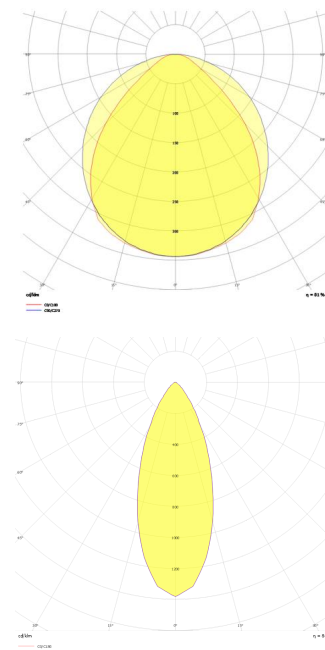

www.atellighting.com

ThinPower

TPW 030 090 036S 8040 10 40 LN 40 TK



Surface Mounted Linear Luminary

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|-------------------|-----------------|
| | TPW 030 090 036S 8040 10 40 LN 40 TK | 36 | 4370 | >80 | 4000 | 40° Opal Diffuser | 30x30x1000 |