


Eye S-M

EYE 005 013 004K 8030 10 36 LN 65 00





Pile and Ground Facade & Landscape Luminary

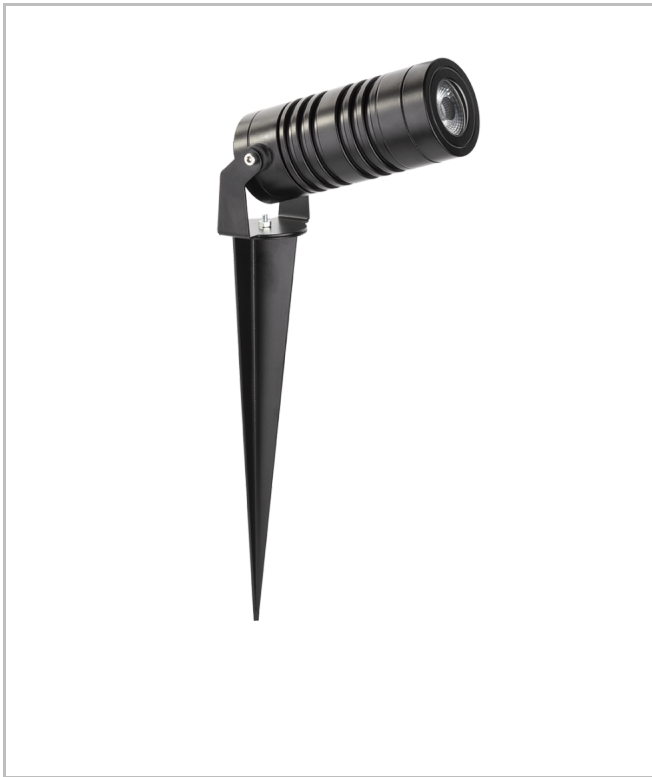


Luminaire Group	Facade & Landscape
Mounting Type	Pile and Ground
Luminaire Color	RAL 9006 - RAL 9005 - RAL 9010
Housing	Aluminum Injection
Optics	10° 25° 36° Lens
Light Source	LED
Electrical Protection Class	CLASS I
IP	65
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	320
Consumption Power	4
Luminaire Efficiency	80 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

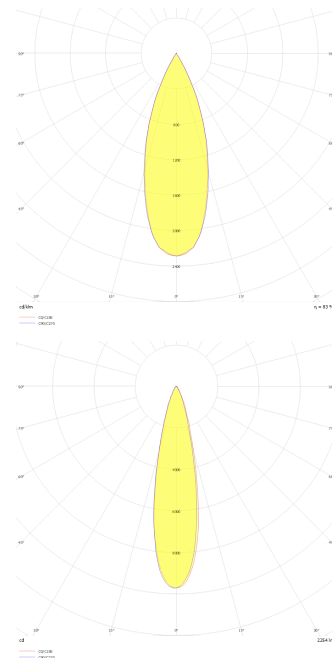


www.atellighting.com

Eye S-M

EYE 005 013 004K 8030 10 36 LN 65 00



Pile and Ground Facade & Landscape Luminary

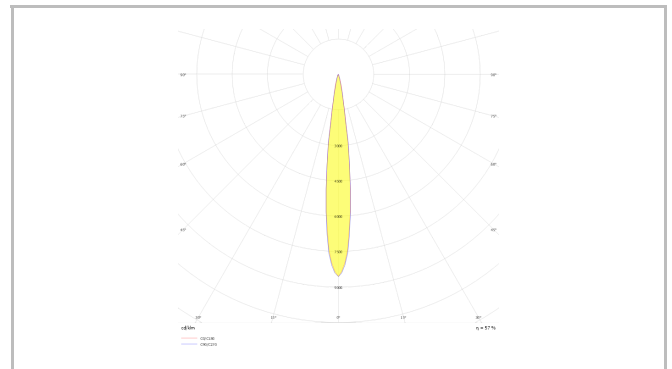

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
71000101□	EYE 005 013 004K 8030 10 36 LN 65 00	4	320	>80	4000	36° Lens	Ø55x99