


Over


OVE 030 030 010Y 8030 10 99 OP 65 00 (1)

Concrete Park & Garden Luminaire

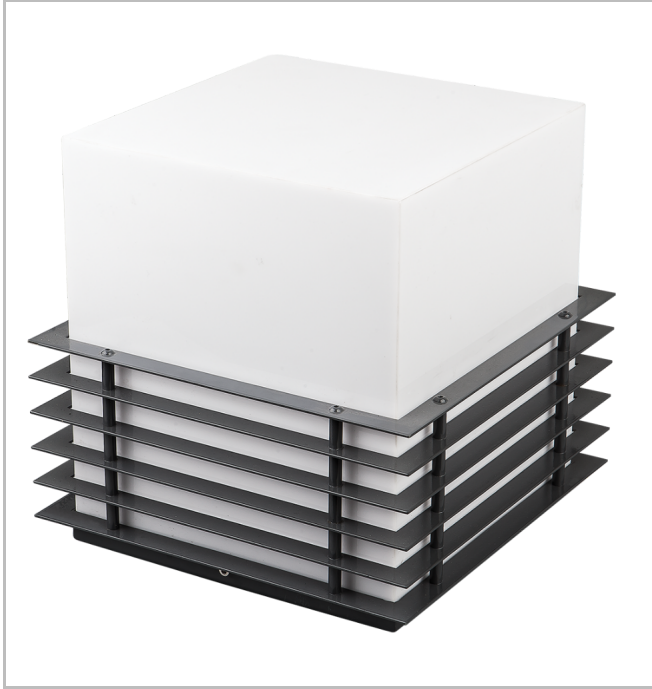

Luminaire Group	Park & Garden
Mounting Type	Concrete
Housing	Dkp Sheet
Optics	Akrilik Difüzör
Light Source	LED
Electrical Protection Class	CLASS II
IP	65
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	720
Consumption Power	15
Luminaire Efficiency	48 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
74000075	OVE 030 030 010Y 8030 10 99 OP 65 00 (1)	15	720	>80	4000	360° Opal Diffuser	400x400x320

www.atellighting.com