

Exit


EXT 025 015 02S 8065 13 99 SD 40 00



Surface Mounted Emergency and Routing Luminary



| | |
|--------------------------------------|-------------------------|
| Luminaire Group | Emergency and Routing |
| Mounting Type | Surface Mounted |
| Housing | Plexiglas |
| Optics | Plexiglas & Flag |
| Light Source | LED |
| Electrical Protection Class | CLASS I |
| IP | 40 |
| IK | 02 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 180 |
| Consumption Power | 2 |
| Luminaire Efficiency | 80 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >70.000 hours |
| Option | 1 Hour - 3 Hours / Dali |

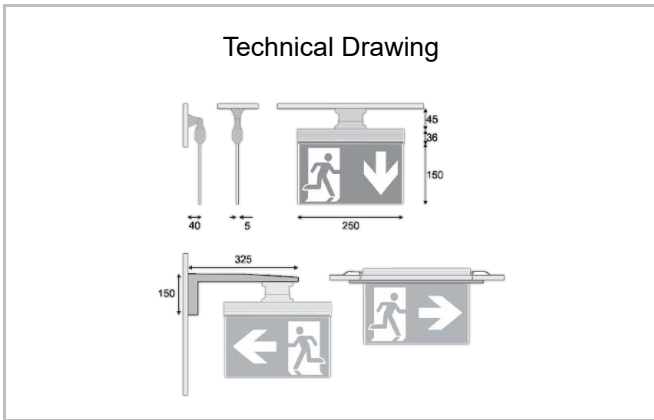

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|-------------------------------------|-----------|--------------------|-----|---------|-------------------|-----------------|
| | EXT 025 015 02S 8065 13 99 SD 40 00 | 2 | 180 | >80 | 4000 | 360° Plexiglas | 250X150 |