

# Thor

TOR 026 014 005A 8065 13 99 SD 65 00 3S




Surface Mounted / Recessed Emergency and Routing Luminary



<b>Luminaire Group</b>	Emergency and Routing
<b>Mounting Type</b>	Surface Mounted / Recessed
<b>Housing</b>	ABS Body
<b>Optics</b>	PC transparent cover
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	65
<b>IK</b>	02
<b>Operating Temperature</b>	-5°C / +45°C
<b>Luminous Flux</b>	450
<b>Consumption Power</b>	5
<b>Luminaire Efficiency</b>	90 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>50.000 hours
<b>Option</b>	Dali / 1 Hour -3 Hours

Technical Drawing

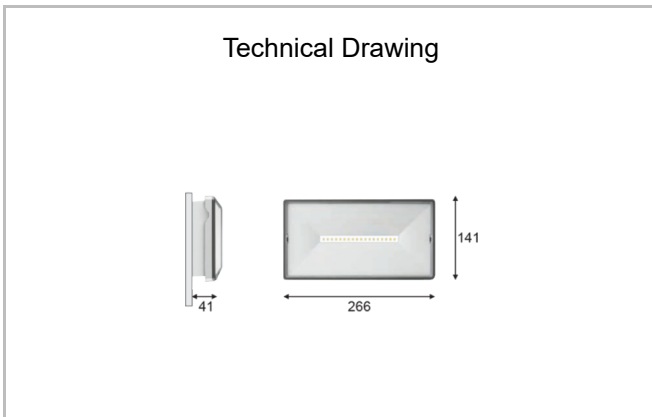

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	TOR 026 014 005A 8065 13 99 SD 65 00 3S	5	450	>80	4000	120° PC Cover	268x141x41

[www.atellighting.com](http://www.atellighting.com)