

Proflood



PRF 557 907 800Y 8040 10 AS LN 66 00



Road Lighting & Floodlight Luminary



| | |
|--------------------------------------|-----------------------------|
| Luminaire Group | Road Lighting & Floodlight |
| Luminary Color | RAL 9005 |
| Housing | Electrostatic Powder Coated |
| Optics | 4 mm Tempered Glass |
| Light Source | Mid Power LED |
| Electrical Protection Class | CLASS II |
| IP | 66 |
| IK | 08 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 104000 |
| Consumption Power | 800 |
| Luminaire Efficiency | 130 lm/W |
| Color Rendering (CRI) | >70 |
| Light Color Temperature (CCT) | 3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >100.000 hours |
| Option | SPD, IP68 Connector |

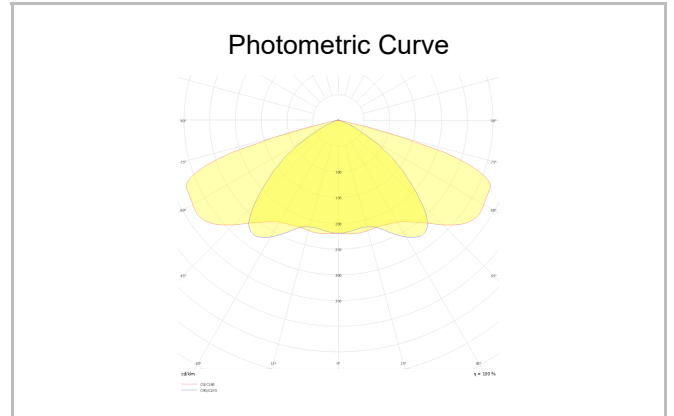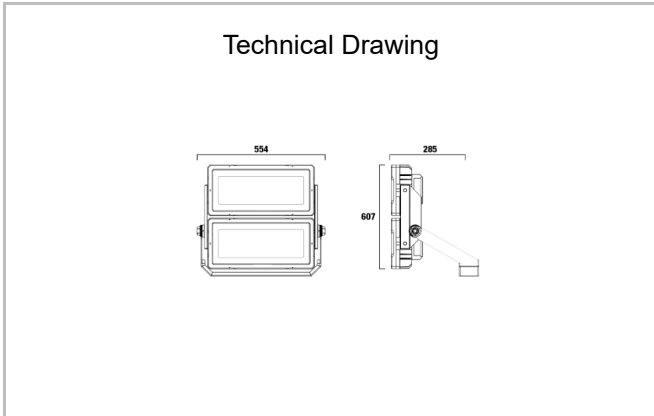

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|-----------------|-----------------|
| | PRF 557 907 800Y 8040 10 AS LN 66 00 | 800 | 104000 | >70 | 4000 | Asymmetric Lens | 554x607x285 |