

Via



VIA 006 023 014D 8040 10 15 CA 65 00



Surface Mounted Wall Mount Luminaire



| | |
|--------------------------------------|-------------------------|
| Luminaire Group | Wall Mount |
| Mounting Type | Surface Mounted |
| Housing | DKP Sheet |
| Optics | Reflector & Glass |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 65 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 1260 |
| Consumption Power | 14 |
| Luminaire Efficiency | 90 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >70.000 hours |
| Option | On-Off / Dali / 1-10V |

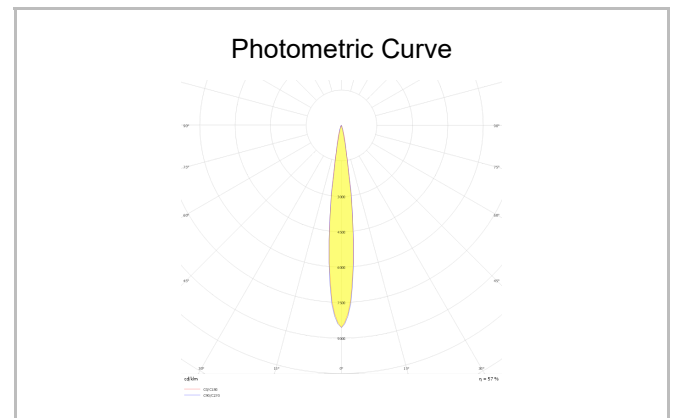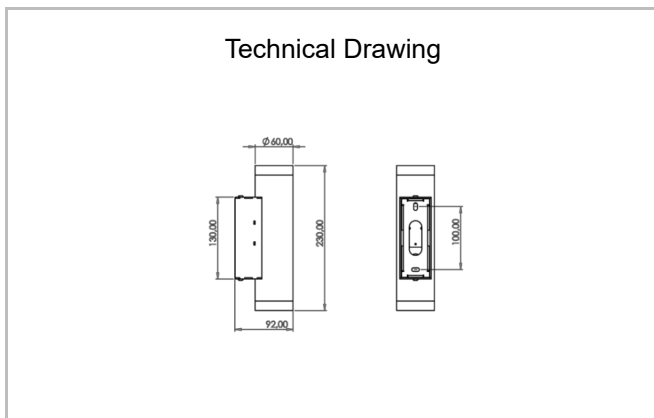

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|----------|--------------------------------------|-----------|--------------------|-----|---------|---------------|-----------------|
| 18100021 | VIA 006 023 014D 8040 10 15 CA 65 00 | 14 | 1260 | >80 | 4000 | 15° Reflector | Ø60x230mm |

www.atellighting.com

24.02.2025 - To access up-to-date information and data about the product, visit the product page: [Via](#)