

Glow HE


GLW 010 078 095S 8040 10 90 LN 66 00

Industrial Luminary




| | |
|--------------------------------------|--|
| Luminaire Group | Industrial |
| Luminary Color | RAL 9005 |
| Housing | Electrostatic Powder Coated Aluminum Extrusion Body |
| Optics | 90° Lens |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 66 |
| IK | 09 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 16262 |
| Consumption Power | 95 |
| Luminaire Efficiency | 171 lm/W |
| Color Rendering (CRI) | >83 |
| Light Color Temperature (CCT) | 4000K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >100.000 hours |
| Option | On-Off / Dali / 1-10V / With Emergency Kit / Industrial |

Technical Drawing



Photometric Curve

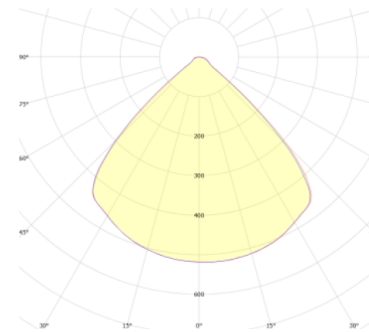

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|----------|-----------------|
| | GLW 010 078 095S 8040 10 90 LN 66 00 | 95 | 16262 | >83 | 4000 | 90° Lens | 539x105x81 |

www.atellighting.com