




# Outline M



## Recessed Linear Luminary

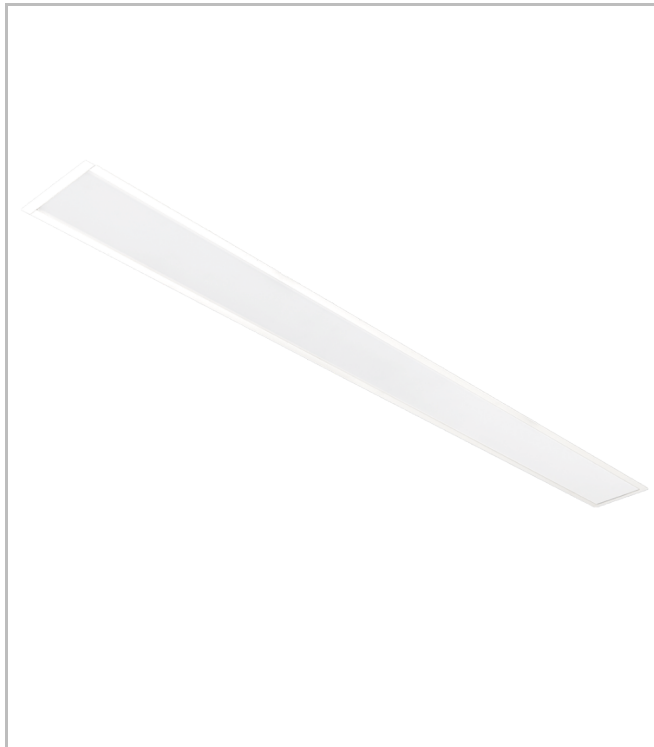

<b>Luminaire Group</b>	Linear
<b>Mounting Type</b>	Recessed
<b>Luminaire Color</b>	RAL 9010 - RAL 9016
<b>Housing</b>	Aluminum extruded profile
<b>Optics</b>	Opal Diffuser
<b>Electrical Protection Class</b>	CLASS II
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	2376 lm / 3610 lm / 4640 lm / 6032 lm
<b>Consumption Power</b>	26 W / 38 W / 50 W / 65 W
<b>Luminaire Efficiency</b>	92,81 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours
<b>Option</b>	On-Off / Dali / 1-10V / With Emergency Kit
<b>Light Source</b>	LED
<b>Luminaire Efficiency</b>	92,81 lm/W

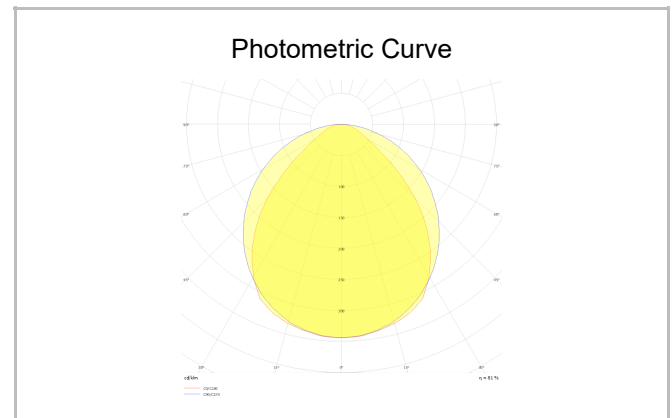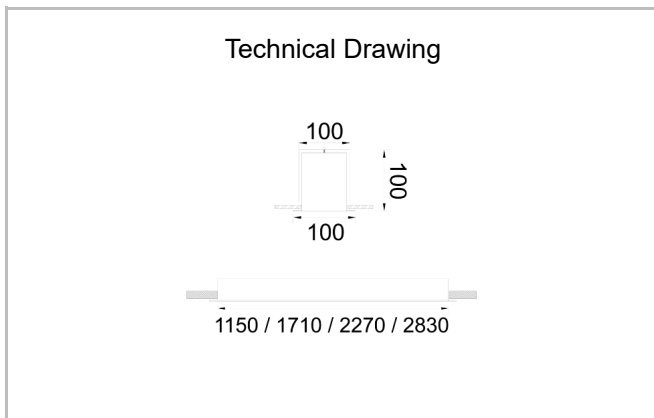

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	OUT 100 113 026A 8040 10 99 OP 40 TK	26	2376	>80	4000	120° / Opal	1150x100x100
	OUT 100 169 038A 8040 10 99 OP 40 TK	38	3610	>80	4000	120° / Opal	1710x100x100
	OUT 100 225 050A 8040 10 99 OP 40 TK	50	4640	>80	4000	120° / Opal	2270x100x100
	OUT 100 283 065A 8040 10 99 OP 40 TK	65	6032	>80	4000	120° / Opal	2830x100x100

# Outline M



Recessed Linear Luminary

---

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	OUT 100 283 065A 8040 10 99 OP 40 TK	65	6032	>80	4000	120° / Opal	0