



Surface Mounted Linear Luminary

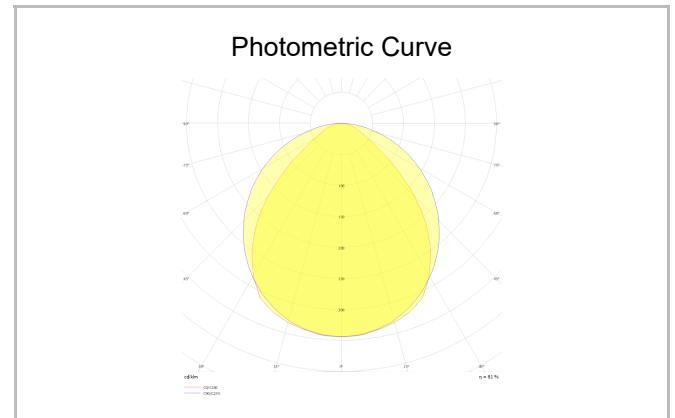

Luminaire Group	Linear
Mounting Type	Surface Mounted
Luminaire Color	RAL 9016 - RAL 9010
Housing	Aluminum extruded profile
Optics	Opal Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	03
Operating Temperature	-20°C / +40°C
Luminous Flux	2376 lm / 3610 lm / 4751 lm / 6081 lm
Consumption Power	25 W / 38 W / 50 W / 64 W
Luminaire Efficiency	95 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours

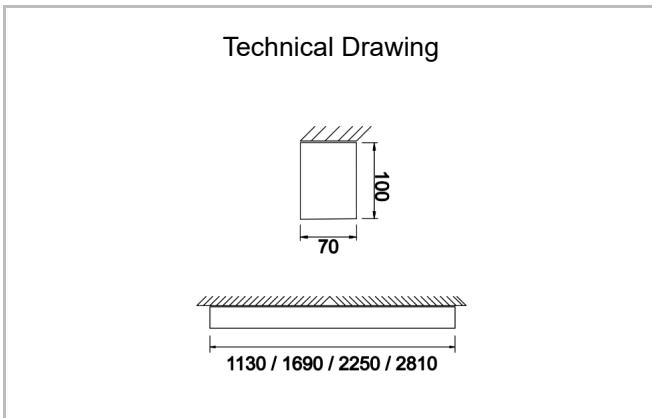

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	OFL 073 113 025S 8040 10 99 OP 40 TK	25	2376	>80	4000	Opal / 120°	1130x73x100
	OFL 073 169 038S 8040 10 99 OP 40 TK	38	3610	>80	4000	Opal / 120°	1690x73x100
	OFL 073 225 050S 8040 10 99 OP 40 TK	50	4751	>80	4000	Opal / 120°	2250x73x100
	OFL 073 281 064S 8040 10 99 OP 40 TK	64	6081	>80	4000	Opal / 120°	2810x73x100