

Outline Cent




Recessed Linear Luminary




Luminaire Group	Linear
Mounting Type	Recessed
Luminaire Color	RAL 9010 - RAL 9005
Housing	Aluminum extruded profile
Optics	Opal Difüzör & Lens 35°
Light Source	LED
Electrical Protection Class	CLASS II
IP	40
IK	03
Operating Temperature	-20°C / +40°C
Luminous Flux	1960 lm / 2870 lm / 3870 lm / 4830 lm
Consumption Power	28 W / 41 W / 54 W / 69 W
Luminaire Efficiency	70 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours

Technical Drawing



Photometric Curve

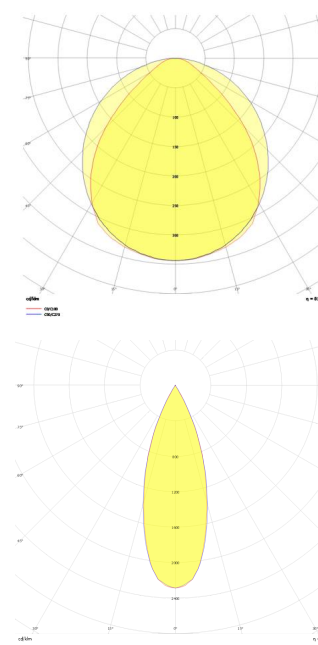

Outline Cent



Recessed Linear Luminary

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	OUT 100 128 028A 8030 10 99 OP 40 LC	28	1960	>80	4000	35°	1280x47x70
	OUT 100 184 041A 8030 10 99 OP 40 LC	41	2870	>80	4000	35°	1840x47x70
	OUT 100 224 054A 8030 10 99 OP 40 LC	54	3870	>80	4000	35°	2240x47x70
	OUT 100 296 069A 8030 10 99 OP 40 LC	69	4830	>80	4000	35°	2960x47x70