




Outline Level S



Recessed Linear Luminary

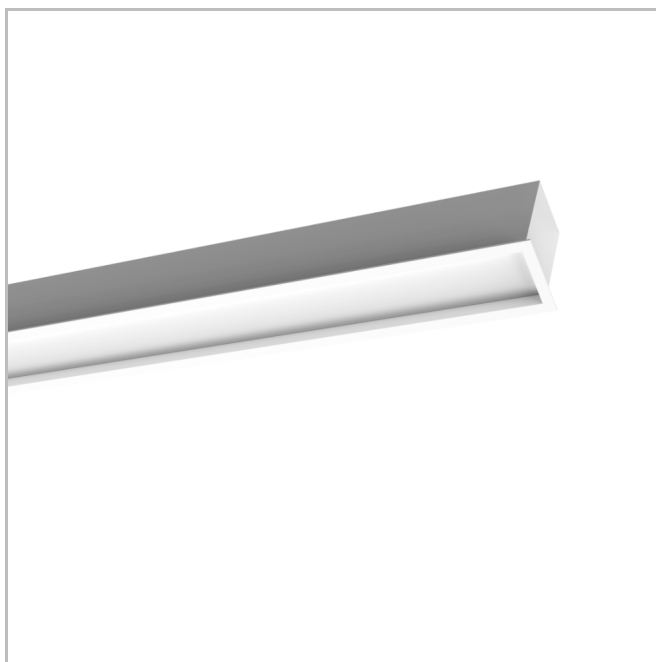

| | |
|--------------------------------------|---------------------------------------|
| Luminaire Group | Linear |
| Mounting Type | Recessed |
| Luminary Color | RAL 9010 - RAL 9005 |
| Housing | Aluminum extruded profile |
| Optics | Opal Diffuser |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 2413 lm / 3526 lm / 4640 lm / 6032 lm |
| Consumption Power | 26 W / 39 W / 52 W / 65 W |
| Luminaire Efficiency | 92,81 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >70.000 hours |

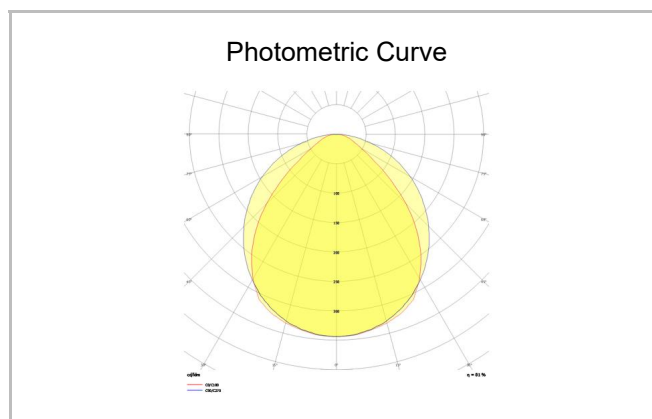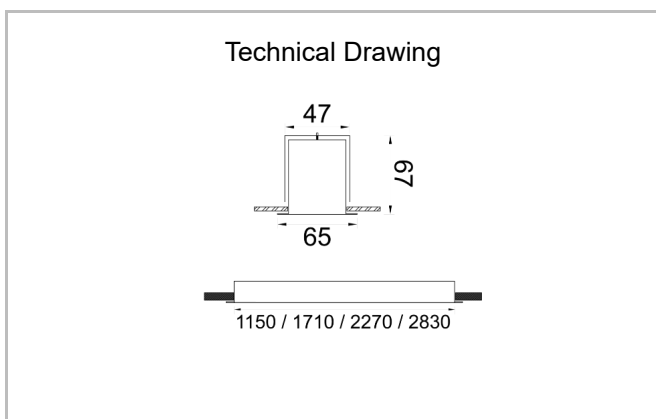

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|--------------------|-----------------|
| | OUT 065 115 026A 8030 10 99 OP 40 LV | 26 | 2413 | >80 | 4000 | 120° Opal Diffuser | 1150x65x67 |
| | OUT 065 171 039A 8030 10 99 OP 40 LV | 39 | 3526 | >80 | 4000 | 120° Opal Diffuser | 1710x65x67 |
| | OUT 065 227 052A 8030 10 99 OP 40 LV | 52 | 4640 | >80 | 4000 | 120° Opal Diffuser | 2270x65x67 |
| | OUT 065 283 065A 8030 10 99 OP 40 LV | 65 | 6032 | >80 | 4000 | 120° Opal Diffuser | 2830x65x67 |