







Luminaire Group	Downlight & Spot
Mounting Type	Recessed
Luminaire Color	RAL 9005 - RAL 9016
Housing	Aluminum Extrusion
Optics	15° 24° 36° Reflector and Transparent Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	44
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	800 lm
Consumption Power	8 W
Luminaire Efficiency	100 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

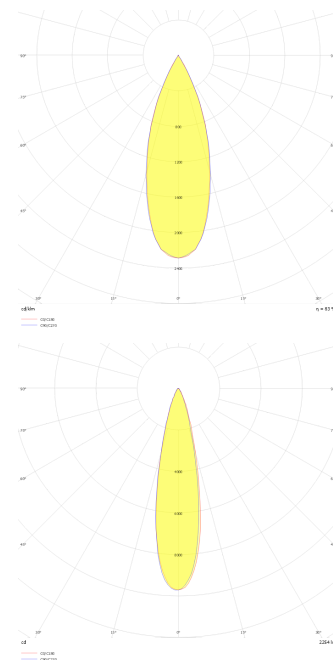

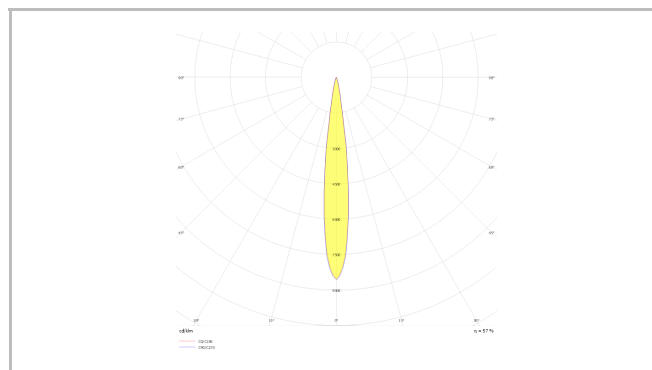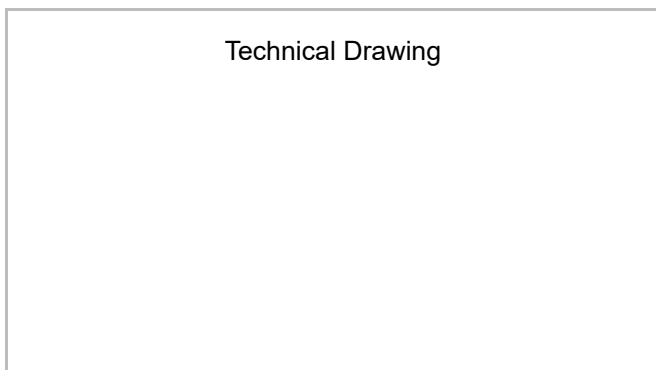

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	WIN 005 005 008T 8040 10 15 LN 44 TH	8	800	>80	4000	15° Reflector	Ø83
	WIN 005 005 008T 8040 10 24 LN 44 TH	8	800	>80	4000	24° Reflector	Ø83
	WIN 005 005 008T 8040 10 36 LN 44 TH	8	800	>80	4000	36° Reflector	Ø83