






| | |
|--------------------------------------|--|
| Luminaire Group | Downlight & Spot |
| Mounting Type | Recessed |
| Luminaire Color | RAL 9010 - RAL 9005 - RAL 9006 |
| Housing | Aluminum Injection |
| Optics | 15° 30° 40° Reflector |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 20 |
| IK | 02 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 3380 lm / 4500 lm |
| Consumption Power | 26 W / 33 W |
| Luminaire Efficiency | 130 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | >100.000 hours |
| Option | On-Off / Dali / 1-10V / With Emergency Kit |

Technical Drawing



Photometric Curve

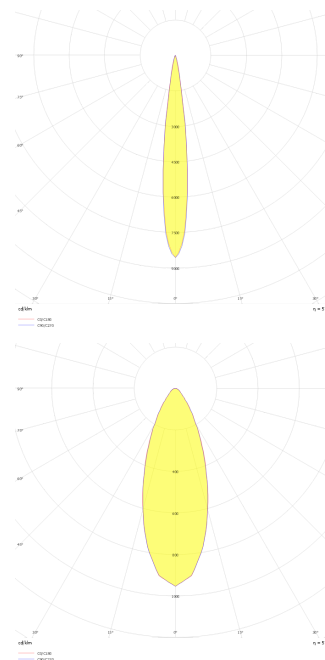

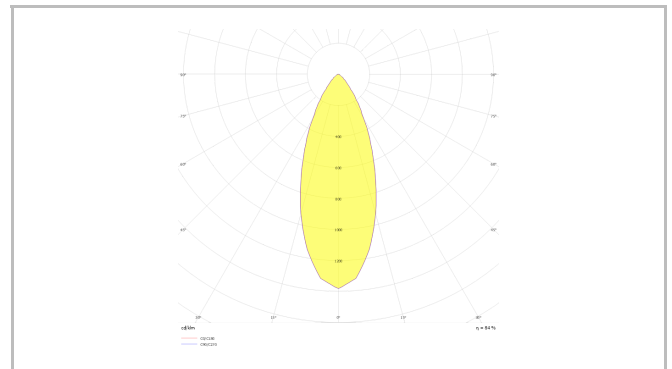

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|----------|--------------------------------------|-----------|--------------------|-----|---------|---------------|-----------------|
| 13002525 | HLX 019 013 026A 8040 10 30 SD 20 00 | 26 | 3380 | >80 | 4000 | 30° Reflector | Ø164x128 |
| 13002543 | HLX 019 013 033A 8040 10 30 SD 20 00 | 33 | 4500 | >80 | 4000 | 30° Reflector | Ø164x128 |