

Pure L




Recessed Downlight & Spot Luminary






Luminaire Group	Downlight & Spot
Mounting Type	Recessed
Luminaire Color	RAL 9005 - RAL 9010 - RAL 9006
Housing	Aluminum Injection
Optics	15° 30° 40° Reflector
Light Source	LED
Electrical Protection Class	CLASS II
IP	44
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	3380 lm / 4500 lm
Consumption Power	26 W / 33 W
Luminaire Efficiency	90 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

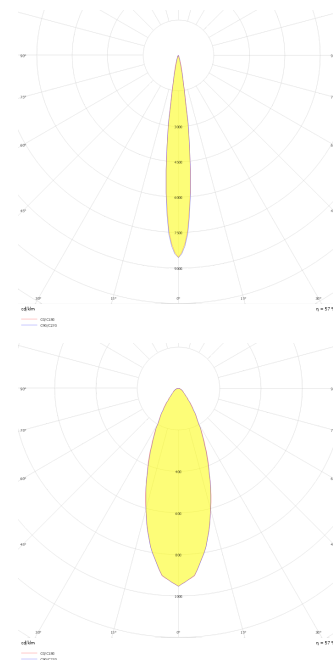

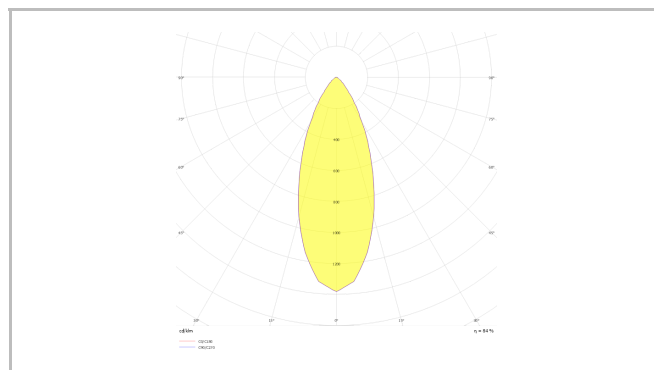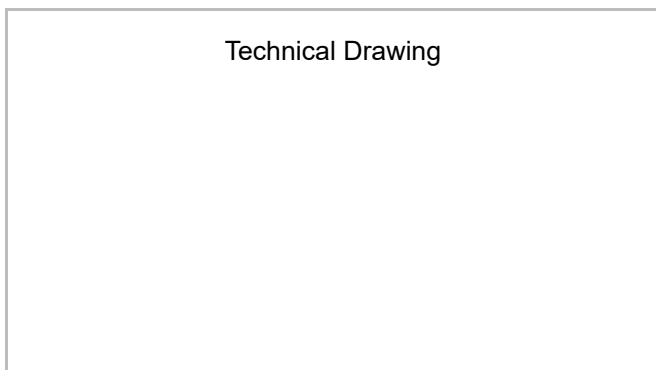

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	PUR 013 011 026T 8040 10 15 SD 40 00	26	3380	>80	4000	15° Reflector	Ø155x148
	PUR 013 011 026T 8040 10 30 SD 40 00	26	3380	>80	4000	30° Reflector	Ø155x148
	PUR 013 011 026T 8040 10 40 SD 40 00	26	3380	>80	4000	40° Reflector	Ø155x148
	PUR 013 011 033T 8040 10 15 SD 40 00	33	4500	>80	4000	15° Reflector	Ø155x148
	PUR 013 011 033T 8040 10 30 SD 40 00	33	4500	>80	4000	30° Reflector	Ø155x148
	PUR 013 011 033T 8040 10 40 SD 40 00	33	4500	>80	4000	40° Reflector	Ø155x148