

# Obi S




## Surface Mounted Luminary




<b>Luminaire Group</b>	Surface Mounted
<b>Mounting Type</b>	Surface Mounted
<b>Luminaire Color</b>	RAL 9005 - RAL 9016
<b>Housing</b>	Aluminum Injection
<b>Optics</b>	15° 30° 40° Reflector & Transparent Diffuser
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	40
<b>IK</b>	02
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	490 lm / 630 lm / 910 lm
<b>Consumption Power</b>	13 W / 7 W / 9 W
<b>Luminaire Efficiency</b>	70 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	70.000 hours
<b>Option</b>	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing



Photometric Curve

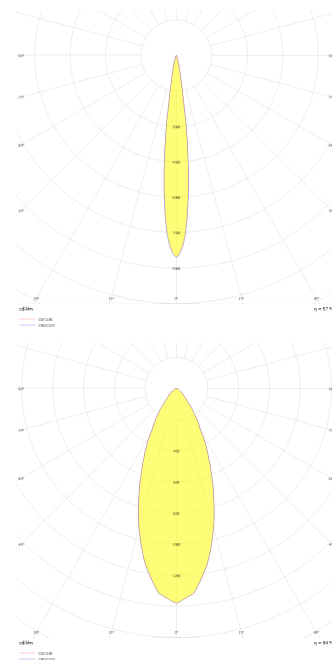

# Obi S



## Surface Mounted Luminary

---

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
15002948	OBI 010 013 007S 9040 10 15 SD 40 00	7	490	>80	4000	15° Transparent Diffuser	Ø102x130
15002964	OBI 010 013 007S 9040 10 30 SD 40 00	7	490	>80	4000	30° Transparent Diffuser	Ø102x130
15002980	OBI 010 013 007S 9040 10 40 SD 40 00	7	490	>80	4000	40° Transparent Diffuser	Ø102x130
15002996	OBI 010 013 009S 9040 10 15 SD 40 00	9	630	>80	4000	15° Transparent Diffuser	Ø102x130
15003012	OBI 010 013 009S 9040 10 15 SD 40 00 (1)	9	630	>80	4000	30° Transparent Diffuser	Ø102x130
15003028	OBI 010 013 009S 9040 10 40 SD 40 00	9	630	>80	4000	40° Transparent Diffuser	Ø102x130
15003044	OBI 010 013 013S 9040 10 15 SD 40 00	13	910	>80	4000	15° Transparent Diffuser	Ø102x130
15002873	OBI 010 013 013S 9040 10 30 SD 40 00	13	910	>80	4000	30° Transparent Diffuser	Ø102x130
15003075	OBI 010 013 013S 9040 10 40 SD 40 00	13	910	>80	4000	40° Transparent Diffuser	Ø102x130