

Coolie S & M & L





Pendant Luminary



Luminaire Group	Pendant
Mounting Type	Pendant
Luminaire Color	RAL 9005 - RAL 9006 - RAL 9010
Housing	DKP Sheet
Optics	E27 Headlight
Electrical Protection Class	CLASS II
IP	20
IK	02
Operating Temperature	-20°C / +40°C
Luminous Flux	
Consumption Power	150 W / 26 W / 33 W
Luminaire Efficiency	lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>16.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit


Technical Drawing



Coolie S & M & L



Pendant Luminary

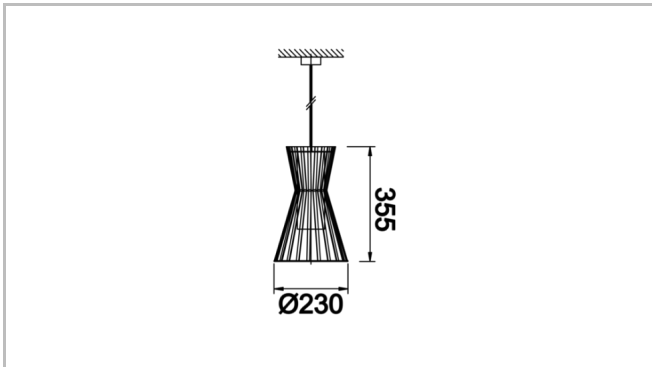

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
19000173□	COL 019 029 150P 0040 10 99 AP 40 00	150		>80	4000	E27	Ø270x410
19000181	COL 023 035 150P 0040 10 99 AP 40 00	26		>80	4000	E27	Ø190x295
19000189□	COL 027 041 150P 0040 10 99 AP 40 00	33		>80	4000	E27	Ø230x355