



<b>Luminaire Group</b>	Wall Mount
<b>Mounting Type</b>	Surface Mounted
<b>Housing</b>	DKP Sheet
<b>Optics</b>	Opal Diffuser
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	20
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	520 lm / 780 lm
<b>Consumption Power</b>	4 W / 6 W
<b>Luminaire Efficiency</b>	130 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours
<b>Option</b>	On-Off / Dali / 1-10V / With Emergency Kit

Technical Drawing

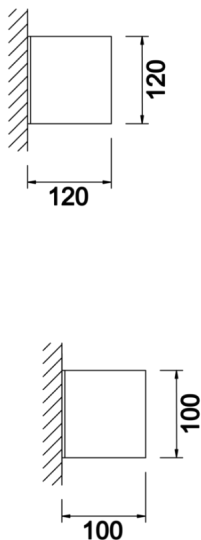

Photometric Curve



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	SIS 010 010 004D 8040 10 99 OP 20 00	4	520	>80	4000	120° Opal Diffuser	120x120x
	SIS 012 012 006D 8040 10 99 OP 20 00	6	780	>80	4000	120° Opal Diffuser	120x120x