



# Woven



## Concrete Park & Garden Luminary

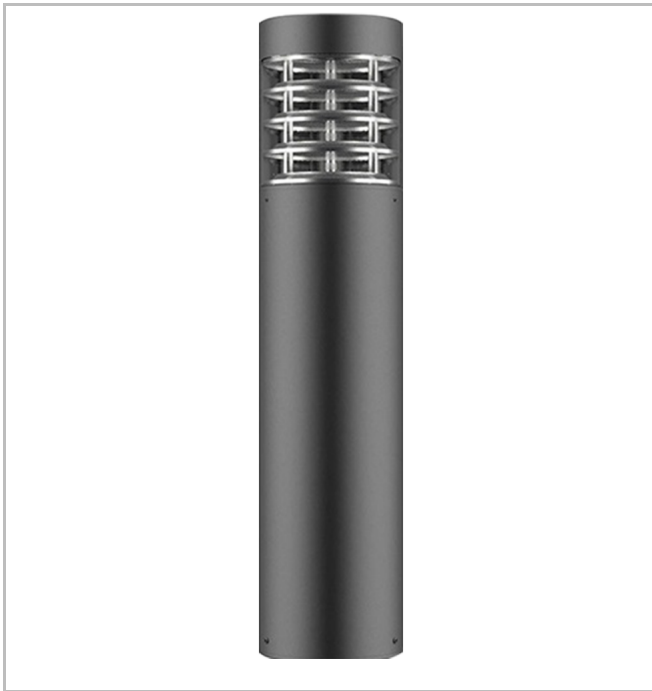

|                                      |                                |
|--------------------------------------|--------------------------------|
| <b>Luminaire Group</b>               | Park & Garden                  |
| <b>Mounting Type</b>                 | Concrete                       |
| <b>Luminaire Color</b>               | RAL 9006 - RAL 9005 - RAL 9010 |
| <b>Housing</b>                       | Aluminum Body                  |
| <b>Optics</b>                        | Reflector                      |
| <b>Light Source</b>                  | LED                            |
| <b>Electrical Protection Class</b>   | CLASS II                       |
| <b>IP</b>                            | 66                             |
| <b>IK</b>                            | 08                             |
| <b>Operating Temperature</b>         | -20°C / +40°C                  |
| <b>Luminous Flux</b>                 | 1180 lm                        |
| <b>Consumption Power</b>             | 9 W                            |
| <b>Luminaire Efficiency</b>          | 131 lm/W                       |
| <b>Color Rendering (CRI)</b>         | >80                            |
| <b>Light Color Temperature (CCT)</b> | 2700K/3000K/4000K/6500K        |
| <b>Color Tolerance</b>               | < 3 SDCM                       |
| <b>Driver Type</b>                   | On/Off                         |
| <b>Input Voltage / Frequency</b>     | 220-240 V AC 50/60 Hz          |
| <b>Power Factor</b>                  | >0.95                          |
| <b>Surge</b>                         | 8/9kV                          |
| <b>THD (AKIM)</b>                    | >%20                           |
| <b>LED life</b>                      | >70.000 hours                  |
| <b>Option</b>                        | On-Off / Dali / 1-10V          |

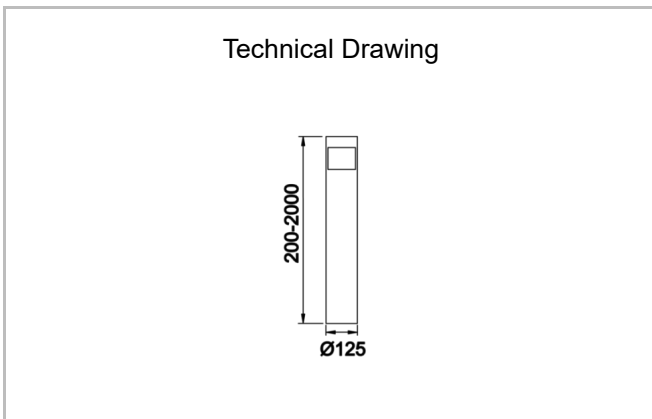

| SKU | Product Code                         | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics             | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|--------------------|-----------------|
|     | WOV 012 050 009S 8040 10 99 OP 66 00 | 9         | 1180               | >80 | 4000    | 360° Opal Diffuser | Ø125x500        |
|     | WOV 012 100 009S 8040 10 99 OP 66 00 | 9         | 1180               | >80 | 4000    | 360° Opal Diffuser | Ø125x1000       |
|     | WOV 150 100 010S 8040 10 99 OP 66 00 | 9         | 1180               | >80 | 4000    | 360° Opal Diffuser | Ø125x1500       |