


# Woven



## Concrete Park & Garden Luminary

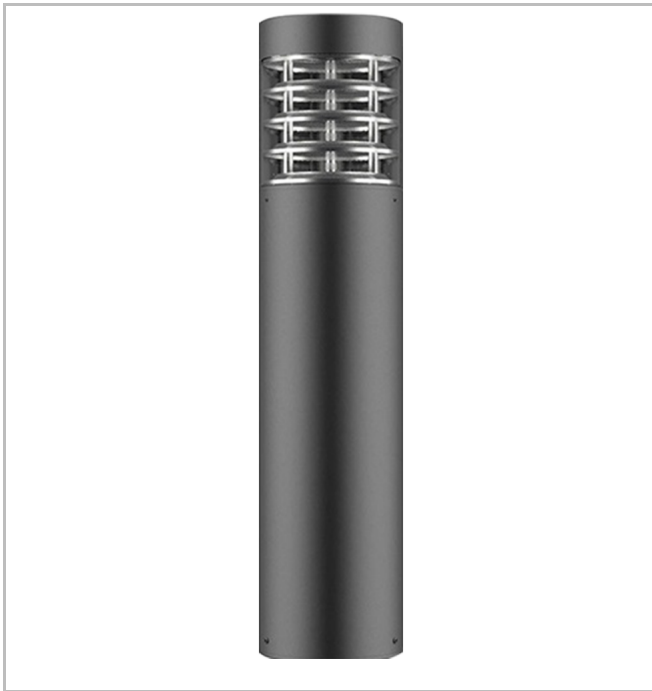

<b>Luminaire Group</b>	Park & Garden
<b>Mounting Type</b>	Concrete
<b>Luminaire Color</b>	RAL 9006 - RAL 9005 - RAL 9010
<b>Housing</b>	Aluminum Body
<b>Optics</b>	Reflector
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	66
<b>IK</b>	08
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	1180 lm
<b>Consumption Power</b>	9 W
<b>Luminaire Efficiency</b>	131 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.95
<b>Surge</b>	8/9kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours
<b>Option</b>	On-Off / Dali / 1-10V

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	WOV 012 050 009S 8040 10 99 OP 66 00	9	1180	>80	4000	360° Opal Diffuser	Ø125x500
	WOV 012 100 009S 8040 10 99 OP 66 00	9	1180	>80	4000	360° Opal Diffuser	Ø125x1000
	WOV 150 100 010S 8040 10 99 OP 66 00	9	1180	>80	4000	360° Opal Diffuser	Ø125x1500