


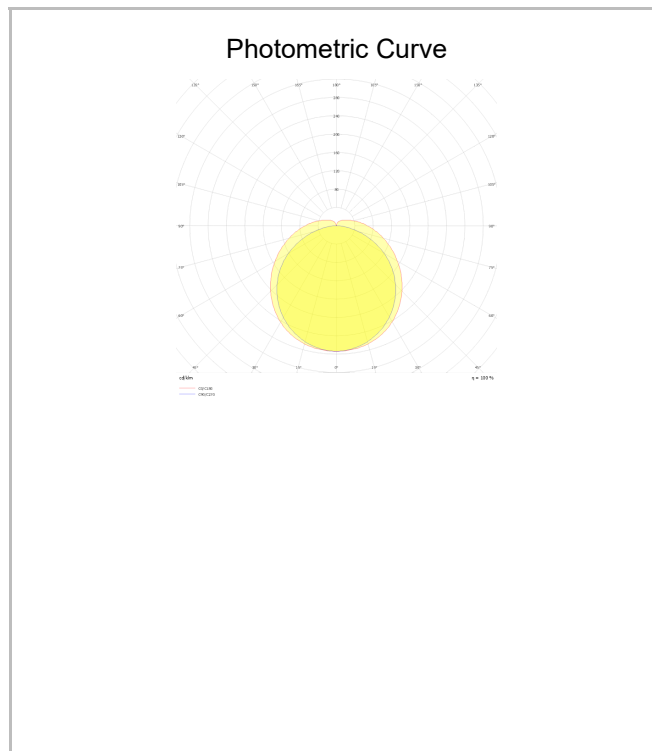


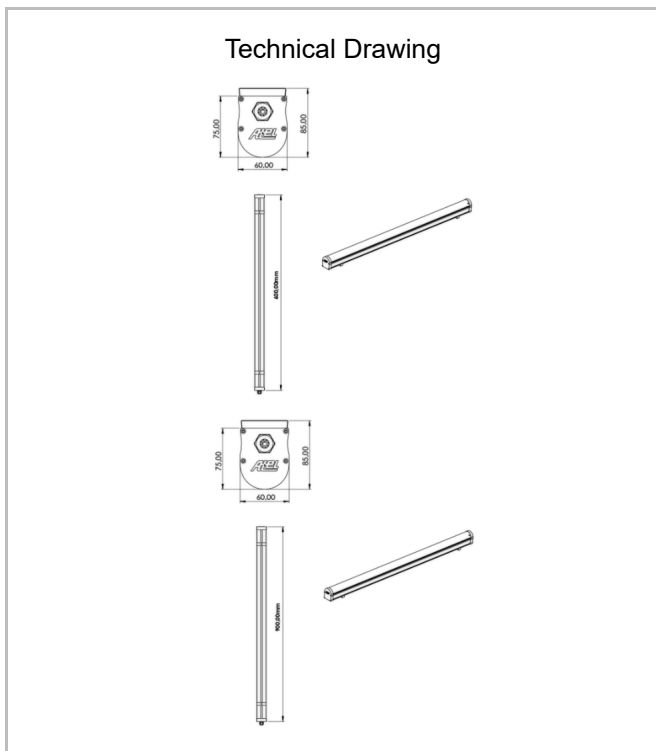

Luminaire Group	Industrial
Mounting Type	Surface Mounted
Housing	Aluminum Anodized Coating
Optics	Opal PC Diffuser
Light Source	LED
Electrical Protection Class	CLASS II
IP	65
IK	09
Operating Temperature	-20°C / +40°C
Luminous Flux	2214 lm / 3444 lm / 4551 lm / 5658 lm / 7986 lm
Consumption Power	18 W / 28 W / 37 W / 46 W / 66 W
Luminaire Efficiency	123 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K / 3000K / 4000K / 6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	70.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit

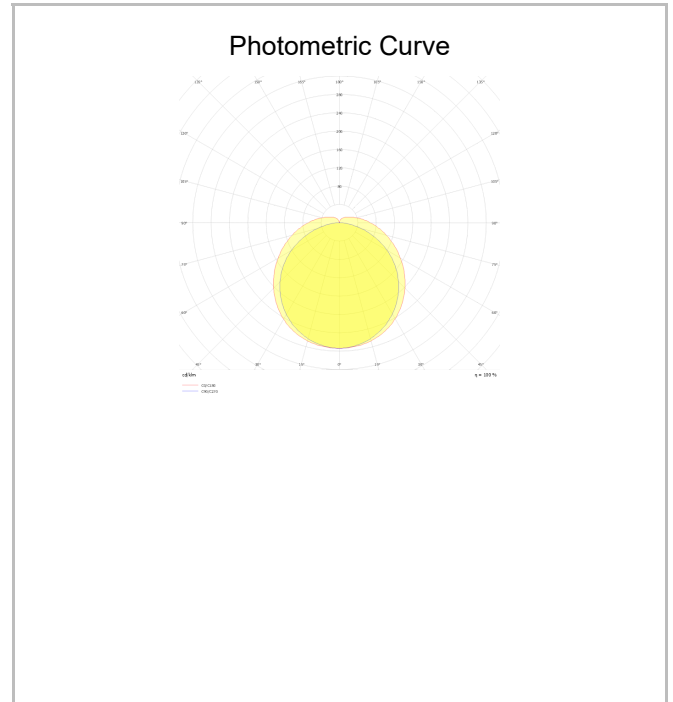

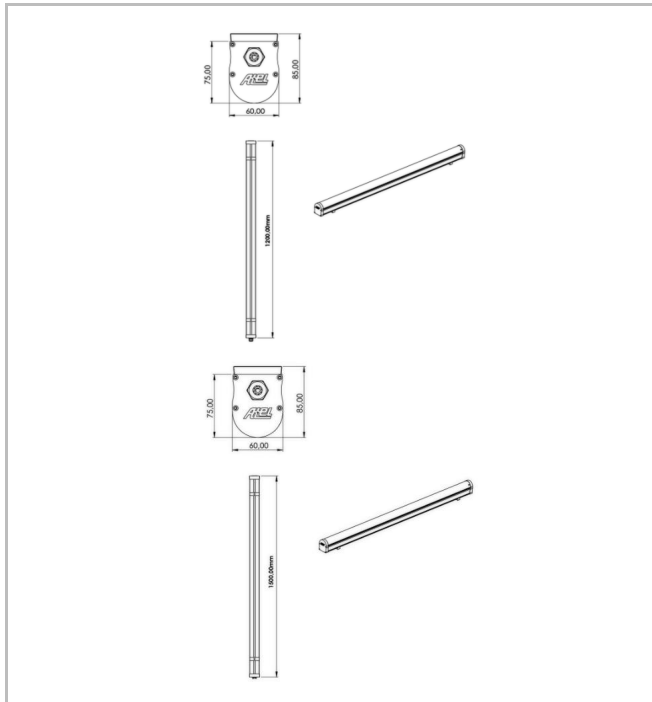

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	LMA 005 060 018S 8040 10 99 OP 65 00	18	2214	>80	4000	120° Opal PC Diffuser	84x75x600
	LMA 005 090 028S 8040 10 99 OP 65 00	28	3444	>80	4000	120° Opal PC Diffuser	84x75x900
	LMA 005 120 037S 8040 10 99 OP 65 00	37	4551	>80	4000	120° Opal PC Diffuser	84x75x1200
	LMA 005 150 046S 8040 10 99 OP 65 00	46	5658	>80	4000	120° Opal PC Diffuser	84x75x1500
	LMA 005 150 066S 8040 10 99 OP 65 00	66	7986	>80	4000	120° Opal PC Diffuser	84x75x1500