




Luminaire Group	Emergency and Routing
Mounting Type	Surface Mounted / Recessed
Housing	ABS Body
Optics	PC transparent cover
Light Source	LED
Electrical Protection Class	CLASS II
IP	65
IK	02
Operating Temperature	-5°C / +45°C
Luminous Flux	270 lm / 450 lm
Consumption Power	3 W / 5 W
Luminaire Efficiency	90 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>50.000 hours
Option	Dali / 1 Hour -3 Hours

Technical Drawing

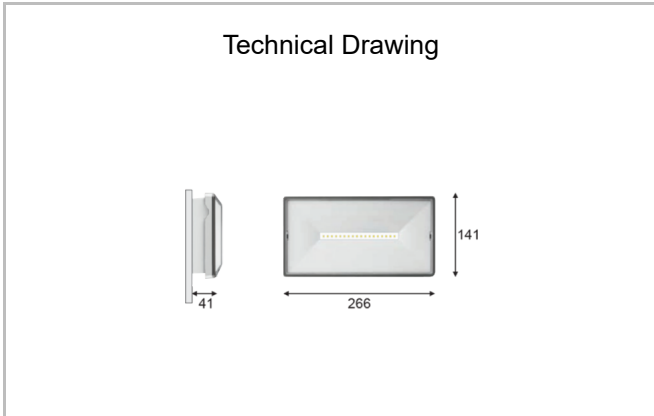

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	TOR 026 014 003A 8065 11 99 SD 65 00 1S	3	270	>80	4000	120° PC Cover	268x141x41
	TOR 026 014 003A 8065 13 99 SD 65 00 3S	5	450	>80	4000	120° PC Cover	268x141x41
	TOR 026 014 005A 8065 11 99 SD 65 00 1S	3	270	>80	4000	120° PC Cover	268x141x41
	TOR 026 014 005A 8065 13 99 SD 65 00 3S	5	450	>80	4000	120° PC Cover	268x141x41