

Parent I Surface Mounted (1)




Surface Mounted Luminary




| | |
|--------------------------------------|--|
| Luminaire Group | Surface Mounted |
| Mounting Type | Surface Mounted |
| Luminaire Color | RAL 9005 - RAL 9006 - RAL 9010 |
| Housing | DKP Sheet |
| Optics | 15° 30° 40° Reflector |
| Light Source | LED |
| Electrical Protection Class | CLASS II |
| IP | 20 |
| IK | 03 |
| Operating Temperature | -20°C / +40°C |
| Luminous Flux | 6760 lm / 9000 lm |
| Consumption Power | 52 W / 66 W |
| Luminaire Efficiency | 130 lm/W |
| Color Rendering (CRI) | >80 |
| Light Color Temperature (CCT) | 2700K/3000K/4000K/6500K |
| Color Tolerance | < 3 SDCM |
| Driver Type | On/Off |
| Driver Brand | Tridonic |
| LED Brand | Samsung |
| Input Voltage / Frequency | 220-240 V AC 50/60 Hz |
| Power Factor | >0.9 |
| Surge | 1kV |
| THD (AKIM) | >%20 |
| LED life | 70.000 hours |
| Option | On-Off / Dali / 1-10V / With Emergency Kit |

Technical Drawing



Photometric Curve

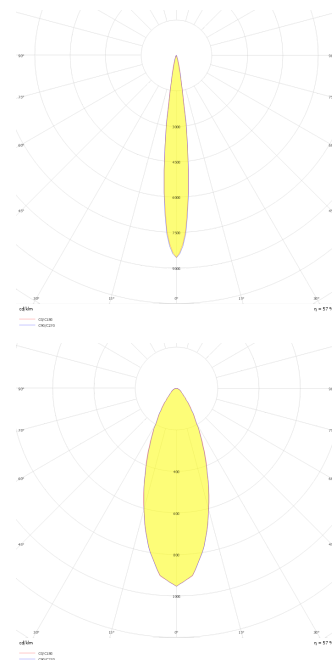


www.atellighting.com

Parent I Surface Mounted (1)



Surface Mounted Luminary

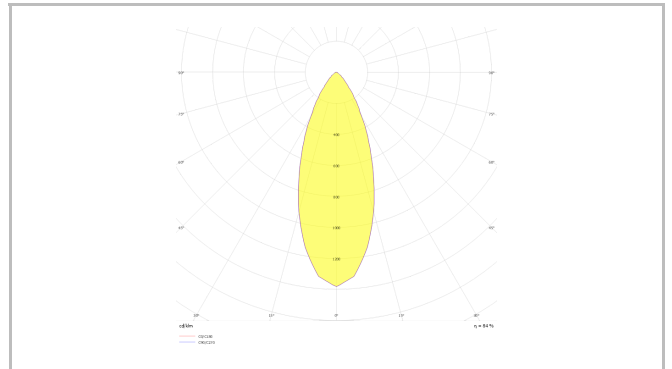

| SKU | Product Code | Power (W) | Luminous Flux (LM) | CRI | CCT (K) | Optics | Dimensions (mm) |
|-----|--------------------------------------|-----------|--------------------|-----|---------|---------------|-----------------|
| | PRT 030 015 052S 8040 10 15 CA 20 00 | 52 | 6760 | >80 | 4000 | 15° Reflector | 300x150x150 |
| | PRT 030 015 052S 8040 10 30 CA 20 00 | 52 | 6760 | >80 | 4000 | 30° Reflector | 300x150x150 |
| | PRT 030 015 052S 8040 10 40 CA 20 00 | 52 | 6760 | >80 | 4000 | 30° Reflector | 300x150x150 |
| | PRT 030 015 066S 8040 10 15 CA 20 00 | 66 | 9000 | >80 | 4000 | 15° Reflector | 300x150x150 |
| | PRT 030 015 066S 8040 10 30 CA 20 00 | 66 | 9000 | >80 | 4000 | 30° Reflector | 300x150x150 |
| | PRT 030 015 066S 8040 10 40 CA 20 00 | 66 | 9000 | >80 | 4000 | 40° Reflector | 300x150x150 |