

Thor

TOR 026 014 005A 8065 13 99 SD 65 00 3S




Surface Mounted / Recessed Emergency and Routing Luminaire



Luminaire Group	Emergency and Routing
Mounting Type	Surface Mounted / Recessed
Housing	ABS Body
Optics	PC transparent cover
Light Source	LED
Electrical Protection Class	CLASS II
IP	65
IK	02
Operating Temperature	-5°C / +45°C
Luminous Flux	450
Consumption Power	5
Luminaire Efficiency	90 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>50.000 hours
Option	Dali / 1 Hour -3 Hours

Technical Drawing

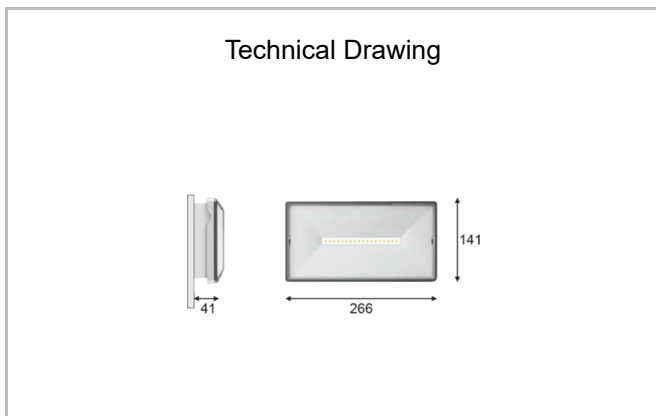

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	TOR 026 014 005A 8065 13 99 SD 65 00 3S	5	450	>80	4000	120° PC Cover	268x141x41

www.atellighting.com