

# Glow HE

GLW 010 078 095S 8040 10 90 LN 66 00




Industrial Luminary




<b>Luminaire Group</b>	Industrial
<b>Luminary Color</b>	RAL 9005
<b>Housing</b>	Electrostatic Powder Coated Aluminum Extrusion Body
<b>Optics</b>	90° Lens
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	66
<b>IK</b>	09
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	16262
<b>Consumption Power</b>	95
<b>Luminaire Efficiency</b>	171 lm/W
<b>Color Rendering (CRI)</b>	>83
<b>Light Color Temperature (CCT)</b>	4000K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>100.000 hours
<b>Option</b>	On-Off / Dali / 1-10V / With Emergency Kit / Industrial

Technical Drawing



Photometric Curve

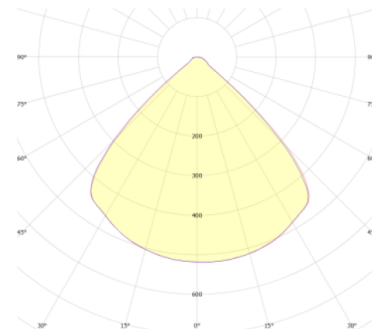

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	GLW 010 078 095S 8040 10 90 LN 66 00	95	16262	>83	4000	90° Lens	539x105x81

[www.atelighting.com](http://www.atelighting.com)