

Loopy




Recessed Concept Ceiling Luminary




Luminaire Group	Concept Ceiling
Mounting Type	Recessed
Luminary Color	RAL 9005 - RAL 9010 - RAL 9006
Housing	Aluminum DKP Sheet
Optics	Reflector
Electrical Protection Class	CLASS II
Operating Temperature	-20°C / +40°C
Luminous Flux	1170 lm / 810 lm
Consumption Power	13 W / 9 W
Luminaire Efficiency	90 lm/W
Color Rendering (CRI)	>80
Light Color Temperature (CCT)	2700K/3000K/4000K/6500K
Color Tolerance	< 3 SDCM
Driver Type	On/Off
Driver Brand	Tridonic
LED Brand	Samsung
Input Voltage / Frequency	220-240 V AC 50/60 Hz
Power Factor	>0.9
Surge	1kV
THD (AKIM)	>%20
LED life	>100.000 hours
Option	On-Off / Dali / 1-10V / With Emergency Kit


Technical Drawing



Photometric Curve

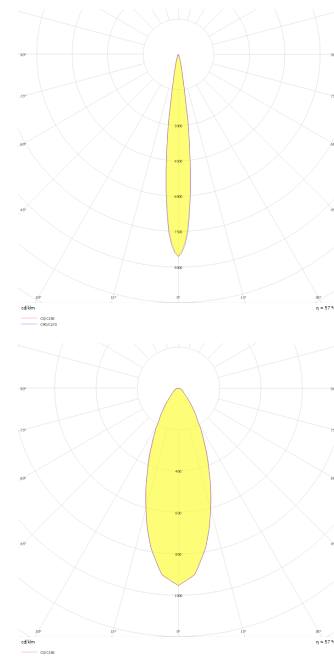

Technical Drawing



SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	LPY 008 011 009B 8040 10 15 SD 20 00	9	810	>80	4000	15° Reflector	Ø87x113
	LPY 008 011 009B 8040 10 30 SD 20 00	9	810	>80	4000	30° Reflector	Ø87x113
	LPY 008 011 009B 8040 10 40 SD 20 00	9	810	>80	4000	40° Reflector	Ø87x113
	LPY 008 011 013B 8040 10 15 SD 20 00	13	1170	>80	4000	15° Reflector	Ø87x113
	LPY 008 011 013B 8040 10 30 SD 20 00	13	1170	>80	4000	30° Reflector	Ø87x113
	LPY 008 011 013B 8040 10 40 SD 20 02	13	1170	>80	4000	40° Reflector	Ø87x113