





<b>Luminaire Group</b>	Park & Garden
<b>Mounting Type</b>	Pole Mounted
<b>Luminaire Color</b>	RAL 9006 - RAL 9005 - RAL 9010
<b>Housing</b>	Aluminum Injection
<b>Optics</b>	PMMA Lens & Tempered Glass
<b>Light Source</b>	LED
<b>Electrical Protection Class</b>	CLASS II
<b>IP</b>	66
<b>IK</b>	08
<b>Operating Temperature</b>	-20°C / +40°C
<b>Luminous Flux</b>	10400 lm / 13000 lm / 3900 lm / 7800 lm
<b>Consumption Power</b>	100 W / 30 W / 60 W / 80 W
<b>Luminaire Efficiency</b>	130 lm/W
<b>Color Rendering (CRI)</b>	>80
<b>Light Color Temperature (CCT)</b>	2700K/3000K/4000K/6500K
<b>Color Tolerance</b>	< 3 SDCM
<b>Driver Type</b>	On/Off
<b>Driver Brand</b>	Tridonic
<b>LED Brand</b>	Samsung
<b>Input Voltage / Frequency</b>	220-240 V AC 50/60 Hz
<b>Power Factor</b>	>0.9
<b>Surge</b>	1kV
<b>THD (AKIM)</b>	>%20
<b>LED life</b>	>70.000 hours
<b>Option</b>	On-Off / Dali / 1-10V

Technical Drawing



Photometric Curve

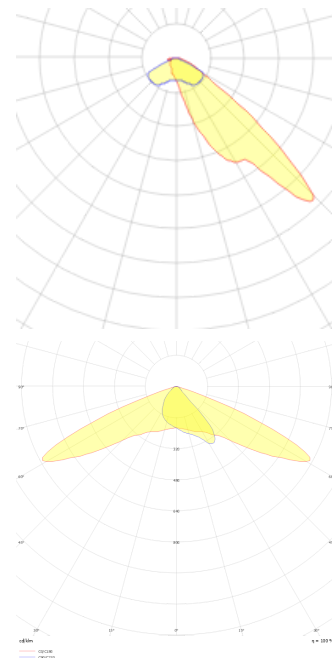

# Eagle



## Pole Mounted Park & Garden Luminary

---

SKU	Product Code	Power (W)	Luminous Flux (LM)	CRI	CCT (K)	Optics	Dimensions (mm)
	EAG 4000 090 030M 8040 10 AS PM 66 00	30	3900	>80	4000	AS° PMMA	4000x900
	EAG 4000 090 060M 8040 10 AS PM 66 00	60	7800	>80	4000	AS° PMMA	4000x900
	EAG 4000 090 080M 8040 10 AS PM 66 00	80	10400	>80	4000	AS° PMMA	4000x900
	EAG 4000 090 100M 8040 10 AS PM 66 00	100	13000	>80	4000	AS° PMMA	4000x900